

Product Specification

DGI 11L&13L CF

Editor: MTS (China)
Version: 002

The information, including all related documents, drawings, etc., is confidential and is the property of MTS Group. It may not be copied or reproduced, or disclosed to any other party, except with prior written authorization of MTS Group.

No:	ITAM WU07JYG-004	Title:	Product specification DGI 11L & 13L CF		
Edition:	002	Date:	2007-3-15	Page:	1/7

Index

1. Codes
2. Generalities
3. Product packing
4. Booklet
5. Product section
6. Technical data

No:	ITAM WU07JYG-004	Title:	Product specification DGI 11L & 13L CF		
Edition:	002	Date:	2007-3-15	Page:	2/7

1. Codes

Codes	Des.	Note
3611514	DGI 11L CF NG ARISTON	New logo
3611515	DGI 11L CF LPG ARISTON	New logo
3611516	DGI 11L CF NG C&M	
3611517	DGI 11L CF LPG C&M	
3611528	DGI 13L CF NG ARISTON	New logo
3611529	DGI 13L CF LPG ARISTON	New logo
3611530	DGI 13L CF NG C&M	
3611531	DGI 13L CF LPG C&M	

2. Product Generalities



11L CF



13L CF

Brand: ARISTON (new logo) / CHAFFOTEAUX&MAURY

Hot water output: 11L/min, 13L/min

Exhaust: Conventional flue

Ignition: Electrical

No:	ITAM WU07JYG-004	Title:	Product specification DGI 11L & 13L CF		
Edition:	002	Date:	2007-3-15	Page:	3/7

Water control: Mechanical knob

Flame control: Mechanical knob

3. **Product packing**

Finish good

Carton material: 5 floors corrugated paper (normal)

Language: English (ARISTON) / French (C&M)

Dimension: 715×400×255 mm (11L CF) 765×455×265 (13L CF)

Gross weight: 12.3Kg/ 11L CF; 15.0Kg/ 13L CF

4. **Booklet**


English (ARISTON) / French (C&M)

No:	ITAM WU07JYG-004	Title:	Product specification DGI 11L & 13L CF		
Edition:	002	Date:	2007-3-15	Page:	4/7

5. Product section



Power switch

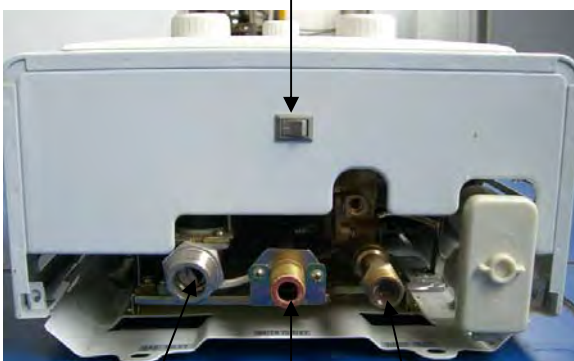

Gas

Hot

Cold

Burners' full/half switch (winter/summer)



Gas

Water

No:	ITAM WU07JYG-004	Title:	Product specification DGI 11L & 13L CF		
Edition:	002	Date:	2007-3-15	Page:	5/7

5. Technical data

Model	11L CF	13L CF
Hot water output(L/Min)	11	13
Heat input(KW)	22	26
Heat efficiency	>80%	
Gas type	Liquefied Petroleum Gas(LPG) / Natural gas (NG)	
Install place	Indoor	
exhaust	Natural flue	
Ignition	Electrical	
burning	Natural burning	
Heat exchange	Convective+ radiant	
Safety protection	Electronic	
Water temperature control	Mechanical	
Display	Light	
Start-up	Automatic (open water tap)	
Rated voltage	DC3V	
Water inlet/outlet	G1/2	
Gas inlet	G1/2	
Exhaust cover	Φ 120mm	
Net weight(Kg)	11.0	13.1
Gross weight(Kg)	12.3	15.0
Dimension (mm)	630×340×165	650×400×170
Colour	Bright white	

Technical labels

Material: Aluminum foil paper;

Position: Right side

Language: English (ARISTON)/ French (C&M)

ATTENTION	
<ul style="list-style-type: none"> ● Do not install it in bathroom or sealed room ● Please keep indoor air ventilating when running ● Please read the manual booklet carefully before use ● Please make sure that the gas type used fits this appliance. 	
Product:	Instantaneous gas water heater
Model:	11L CF
Gas used:	Liquefied Petroleum Gas
Gas supply pressure:	2.8KPa
Heat input:	22 KW
Hot water output:	11L/min (ΔT=25℃)
Electric input:	DC3V
Water pressure:	0.025~1.0MPa

11L CF

ATTENTION	
<ul style="list-style-type: none"> ● Do not install it in bathroom or sealed room ● Please keep indoor air ventilating when running ● Please read the manual booklet carefully before use ● Please make sure that the gas type used fits this appliance. 	
Product:	Instantaneous gas water heater
Model:	13L CF
Gas used:	Liquefied Petroleum Gas
Gas supply pressure:	2.8KPa
Heat input:	26 KW
Hot water output:	13L/min (ΔT=25℃)
Electric input:	DC3V
Water pressure:	0.025~1.0MPa

13L CF

No:	ITAM WU07JYG-004	Title:	Product specification DGI 11L & 13L CF		
Edition:	002	Date:	2007-3-15	Page:	6/7

Update Record

Date	Updated by	Version	Note
2007-2-26	Jonathan You / Shao Bo	001	
2007-3-15	Jonathan You / Shao Bo	002	Add 13L CF